

Circulator

Features

- Compact size
- Low insertion loss
- Compliance with Telcordia GR-1221-CORE

Applications


- OADM Node
- Raman
- OTDR



Main Specifications

Parameter	Max	Min	Specification	Unit
Wavelength Range			C-band / O-band / S-band	nm
Insertion Loss	√		0.8	dB
Isolation		√	35	dB
Cross Talk		√	50	dB
TDL	√		0.2	dB
Return Loss		√	50	dB
PDL	√		0.1	dB
PMD	√		0.05	ps
Operating Temperature Range			0~+70	°C
Storage Temperature Range			-40~+85	°C
Storage Humidity			5~+95	%RH
Input Optical Power	√		500	mW

Dimensions

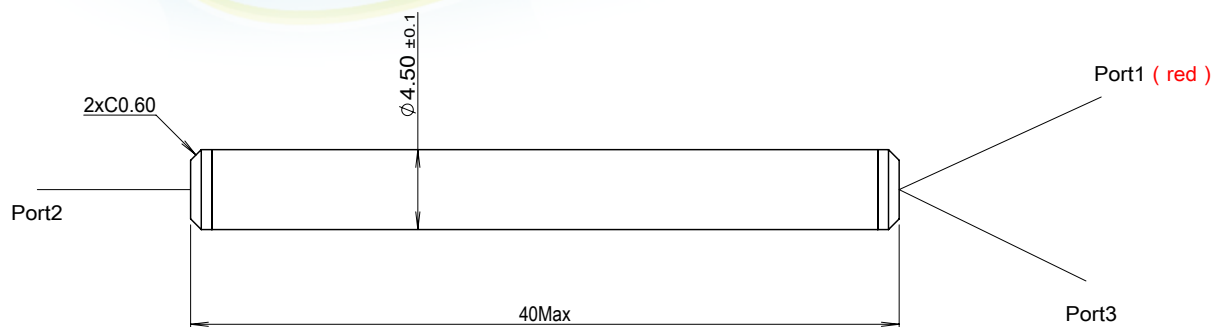

Order Information

- The above specifications represent the typical performance of an O-Net circulator of this category.
- Please contact our Sales to discuss your specific requirements.